




Even better.



NexD™  
SWITCHING TECHNOLOGY

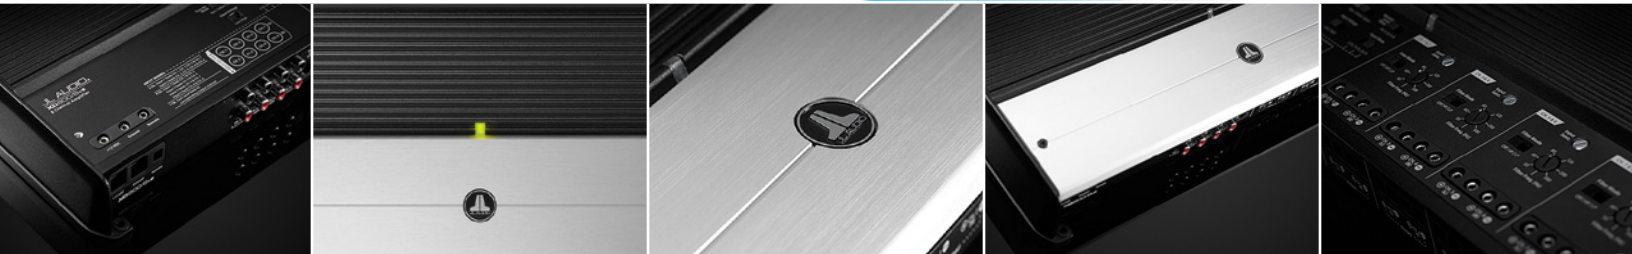

## XDv2: Full-Range Amplifiers

The great-sounding NexD™ switching technology that debuted in the original XD amplifiers carries over unchanged to the XDv2's, as does the compact chassis design and flexible feature set.

Under the hood, we have done some upgrading to give the XDv2's even more flexibility and integration capabilities than their predecessors.

All XDv2 models offer the convenience of automatic turn-on (signal or DC-offset sensing), making them easier to integrate with OEM systems. We have also upgraded the input sections to have equal capabilities as our flagship HD amplifiers, accepting a wide range of input signals, from line-level all the way to high-power speaker level

signals (with a dual-range switch). The final tweak is an improved remote level circuit, with more linear behavior.

In all of our full-range XDv2 amplifiers, each channel pair offers a powerful 75W x 2 into 4 ohms, bridgeable to 200W x 2 into 4 ohms, for high-power applications. All you have to decide is how many channels you need, and then choose the appropriate model: 2-channel, 4-channel, 6-channel or 8-channel.


Whether you are building a simple two-channel system or a really sophisticated, multi-way setup with active filtering, there is an XDv2 full-range amplifier to fill almost any need.

Model	Description	Continuous Power (RMS Method)	THD+N at Rated Power	Frequency Response	Damping Factor	Dimensions H x W x D
<b>XDv2 Amplifiers</b>						
<b>XD200/2v2</b>	Class D, Full-Range 2-Channel Amplifier	75W RMS x 2 @ 4 ohms 100W RMS x 2 @ 2 ohms Bridged: 200W RMS x 1 @ 4 ohms (Ratings at 14.4V supply voltage)	<1%	12 Hz - 22 kHz (+0, -1dB)	>150 @ 4 ohms per ch./ 50 Hz >75 @ 2 ohms per ch./ 50 Hz	2.05 in. x 6.85 in. x 7.09 in. 52 mm x 174 mm x 180 mm
<b>XD400/4v2</b>	Class D, Full-Range 4-Channel Amplifier	75W RMS x 4 @ 4 ohms 100W RMS x 4 @ 2 ohms Bridged: 150W RMS x 2 @ 8 ohms Bridged: 200W RMS x 2 @ 4 ohms (Ratings at 14.4V supply voltage)	<1%	12 Hz - 22 kHz (+0, -1dB)	>150 @ 4 ohms per ch./ 50 Hz >75 @ 2 ohms per ch./ 50 Hz	2.05 in. x 8.52 in. x 7.09 in. 52 mm x 217 mm x 180 mm
<b>XD600/6v2</b>	Class D, Full-Range 6-Channel Amplifier	75W RMS x 6 @ 4 ohms 100W RMS x 6 @ 2 ohms Bridged: 150W RMS x 3 @ 8 ohms Bridged: 200W RMS x 3 @ 4 ohms (Ratings at 14.4V supply voltage)	<1%	12 Hz - 22 kHz (+0, -1dB)	>150 @ 4 ohms per ch./ 50 Hz >75 @ 2 ohms per ch./ 50 Hz	2.05 in. x 10.23 in. x 7.09 in. 52 mm x 260 mm x 180 mm
<b>XD800/8v2</b>	Class D, Full-Range 8-Channel Amplifier	75W RMS x 8 @ 4 ohms 100W RMS x 8 @ 2 ohms Bridged: 150W RMS x 4 @ 8 ohms Bridged: 200W RMS x 4 @ 4 ohms (Ratings at 14.4V supply voltage)	<1%	12 Hz - 22 kHz (+0, -1dB)	>150 @ 4 ohms per ch./ 50 Hz >75 @ 2 ohms per ch./ 50 Hz	2.05 in. x 14.73 in. x 7.09 in. 52 mm x 374 mm x 180 mm



### Remote Level Control (HD-RLC)

With the addition of an HD-RLC you can control the overall level of the subwoofer from the front of your vehicle.

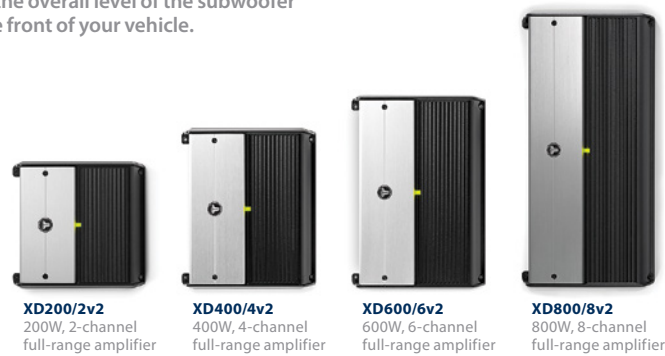

XDv2 Full-Range Amplifiers



©2014 JL Audio, Inc. "JL Audio", "Ahead of the Curve" and the JL Audio logo are registered trademarks of JL Audio, Inc. Due to our policy of continuous product development, all specifications are subject to change without notice.

[www.jlaudio.com](http://www.jlaudio.com)

10369 North Commerce Parkway • Miramar, Florida • 33025 • USA

SKU#97213 12-2013  
Printed in U.S.A.